




All models are equipped with Toyota intelligent comfort seats and enlarged and thickened engine hood as standard



Independently developed and produced integral casting counterweight, which is more than at least 100KG heavier than other competitors, maintaining value and more stable

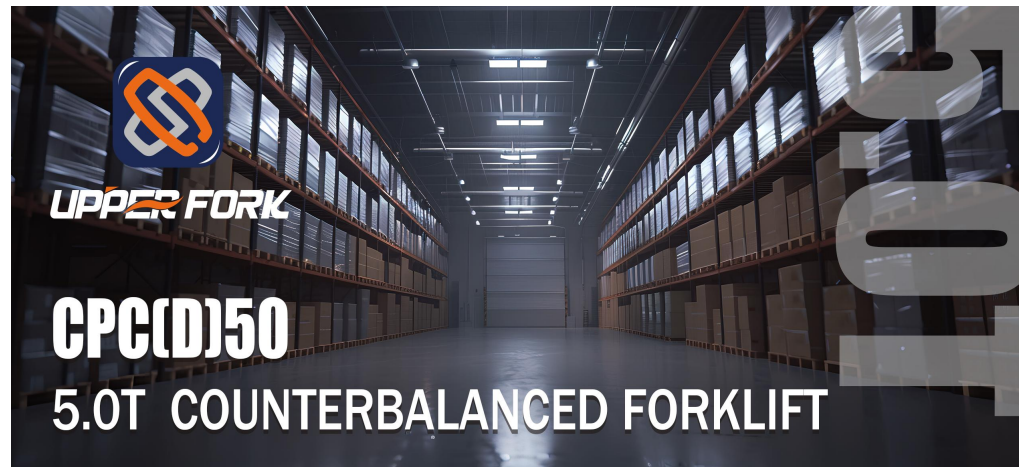

The only company in China that uses robots to weld all structural parts, ensuring welding accuracy and quality



Wide-view mast design and downward-moving cab instrument panel increase the driver's operating field of vision by 30% and improve safety



LED lamps, energy saving, long life, high brightness.



USA Cascade slider, lifetime warranty.



PARAMETERS & PERFORMANCE CPC(D)50

General		
Manufacturer		SHANGCHA
Model		CPC(D)50
Power Type		Diesel
Rated Load Capacity	Q(kg)	5000
Load Centre	C(mm)	500
Characteristic & Dimension		
Rated Lift Height	H3(mm)	3000
Free Lift Height	H2(mm)	130
Mast Tilt Angle (F/R, α°/β°)	$^\circ$	$6^\circ/10^\circ$
Travel Speed (Full Load/No Load)	km/h	21/21.6
Lifting Speed (Full Load/No Load)	mm/s	490/510
Max.Gradeability(Full Load/No Load)	%	19/20
Turning Radius	Wa(mm)	1930
Total weight	kg	6700
Wheelbase	Y(mm)	2100
Fork Size (LxWxT)	mm	1070×155×55
Fork Overhang	X1(mm)	560
Rear Overhang	X2(mm)	588
Length to Face of Fork (Without Fork)	L1(mm)	3248
Overall Width	B1(mm)	1480
Mast Lowered Height	H1(mm)	2275
Overhead Guard Height	H5(mm)	2265
Power &Transmission		
Battery	V/Ah	24/80
Engine Model		4C6-85U32
Engine Manufacturer		QUANCHAI
Rated Output /r.p.m.	kw	62.5/2200
Rated Torque /r.p.m.	N·m	320/1800
Operating Pressure (For Attachments)	Mpa	20

